




PLAN

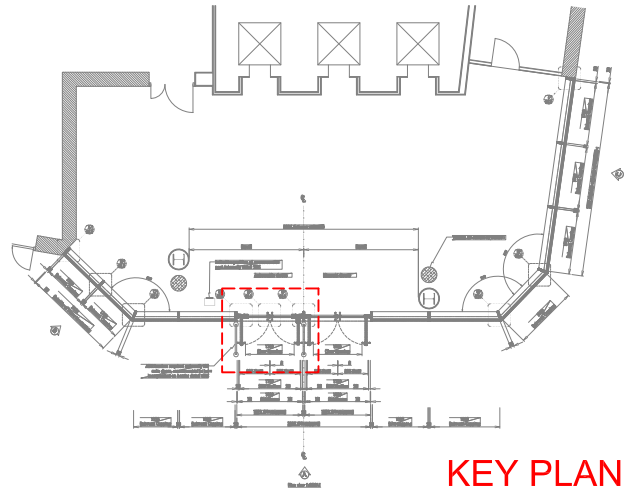


KEY PLAN

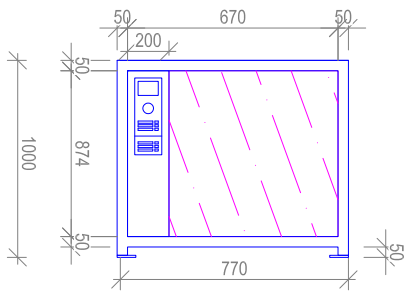

ELEVATION AA

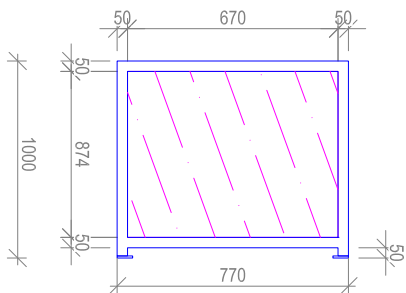

ELEVATION BB

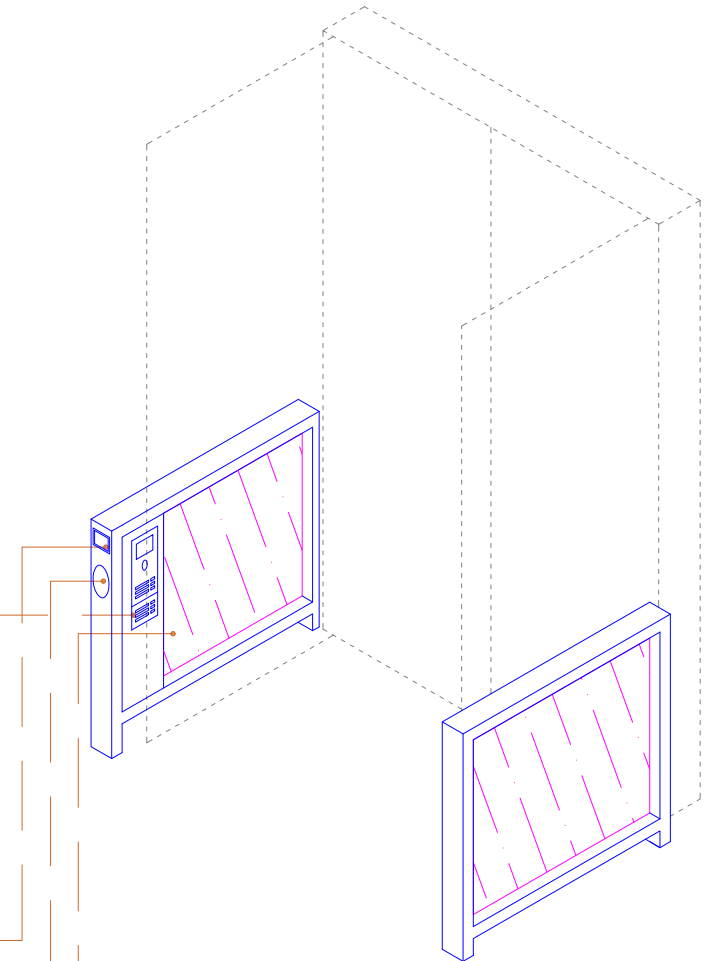

- Intercom
- Card Reader
- DDA Pushpad semi flushed
- Glass infill panel with post
- 10mm toughened glass with polished edges

NOTES

1. As per EN16005 infill panel is required
2. The minimum gap allowed between open door and barrier is 25mm, max gap is 50mm therefore infill panel will have to be offset on door entry post
3. 10mm clear toughened glass

SPECIALIST DESIGNER

PROJECT TITLE	DRAWING TITLE		
CLIENT	DRAWING NUMBER	Rev	
Scale	Date	Drawn	Checked